



WE ARE FORMING YOUR IDEAS

UNI- SAFETY NET

UNI- SAFETY NET

Construction Safety Nets are used at high-rise building construction sites for preventing accidental fall of people or objects in the site. Construction safety nets are the safest and the most cost-effective fall prevention system in the world.

Advantages:

- Light Weight
- Water Resistant
- Weather Resistant
- Easy To Install





TECHNICAL DATA:

- Fully Compliant Nets and Assembly manufactured to EN Standards
- Double layer nets made up of 60x60 and 20x20 nets (Heavy Duty) or 100x100 and 20x20 nets (Medium Duty) manufactured from high tensity polypropylene (HT, PP) material with an optional light duty Debris net as third layer.
- UV Treatment to resist sun damage.
- 3.1m Standard width or 4.7m Extra Wide width
- Resistant to high wind loads, able to be tied top/ bottom against overturning.
- 0.85m overlap between units providing more protection between units
- Full range of accessories to enable connection to various types and shapes of structures.
- Manufactured from Steel (Painted or Galvanized finish) and Patented Extruded

Aluminum profiles to provide optimum strength and weight.


SAFETY NET TYPE :

- Standard type
- Wide type
- Vertical type






STANDARD TYPE

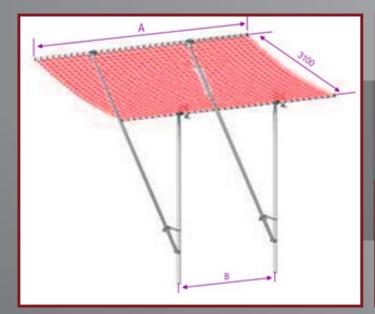

	6.00m Nominal UNIT		4.00 UNIT	
•		·	•	

Body Type	Width	А	В	Weight *
2.75m	3.10m	5.85m	3.50m±0.25	109 kg
2.75m	3.10m	4.00m	1.65m±0.25	100 kg
3.25m	3.10m	5.85m	3.50m±0.25	114 kg
3.25m	3.10m	4.00m	1.65m±0.25	105 kg

WIDE TYPE

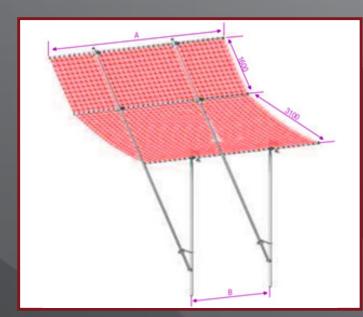

6.00m Nominal XW UNIT		4.00m XW UNIT	

Body Type	Width	A	В	Weight *
2.75m	4.70m	5.85m	3.50m±0.25	127 kg
2.75m	4.70m	4.00m	1.65m±0.25	114 kg
3.25m	4.70m	5.85m	3.50m±0.25	132 kg
3.25m	4.70m	4.00m	1.65m±0.25	119 kg



Width	Length		
4.0 m 6.0 m 7.0 m 9.0 m	7.5 m	2 FLOORS	
4.0 m 6.0 m 7.0 m 9.0 m	11.5 m	3 FLOORS	
4.0 m 6.0 m 7.0 m 9.0 m	15 m	4 FLOORS	



Contact Us

Info@unisteel.com.sa



